

CONCERT . LIVE MUSIC

# MX-1201 FLOOR MONITOR



The Best Clarity of Sound



## MX-1201 FLOOR MONITOR

### Technical specification

Description	: Passive 2 way
Frequency Response (-3dB)	: 105-2000Hz
Operating Range	: 70-2000Hz
Components	: HF 1 X 1 inch Neo : LF 1 X 12 inch
Nominal Impedance	: 8 ohms
Sensitivity	: 98 db @ 1W/1m (free-space)
Maximum Input	: 32V (RMS), 130W (con't), 520W (peak)
Maximum Output	: 119db (free-space)
DSP Recommendation	: High Pass Filter 70Hz, 12db/oct
Amplifier Recommendation	: 150W (con't) - 300W (con't) @8 ohms
Dimension	: 290mm(h) X 533mm(w) X 440mm(d)
Weight	: 16 kg
Finish	: Texture Polyurethane, Powder coated
Enclosure	: Multiplex 15mm


musik  
messe



Musikmesse - Europe's biggest trade fair for the music industry  
Frankfurt 2 to 5 April 2019

X9PROAUDIO | X9 Pro Audio Indonesia | www.x9proaudio.com | MADE IN INDONESIA

supported by



# MX-1201 FLOOR MONITOR

WAVE PARAMETER




The Best Sound of Clarity



## Impedance

Min Z 180 Hz - 20000 Hz = 7.3 Ohms @20160 Hz

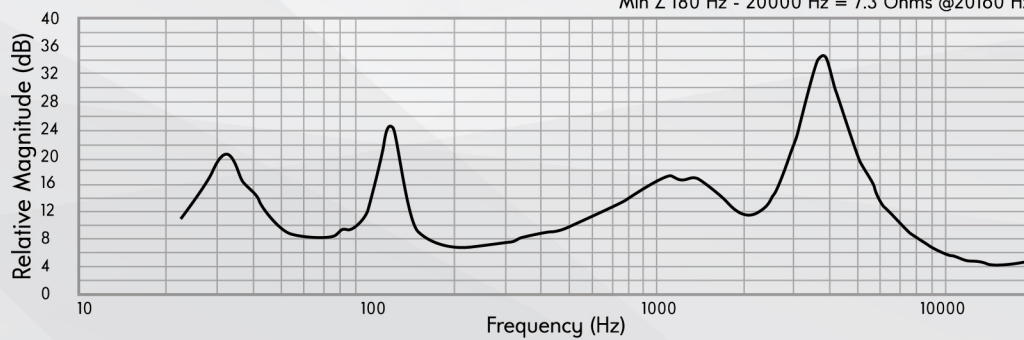

## Frequency Response

1/6 Octave Smoothing, 1W/1m

